AD-A156 929   QUASISTATIC CHARACTERISTICS OF ASYMMETRICAL AND COUPLED   1/1
                 COPLANAR-TYPE TRA..(U) ILLINOIS UNIV AT URBANA
                 ELECTROMAGNETIC COMMUNICATION LAB   T KITAZAWA ET AL.

UNCLASSIFIED   APR 85 UIEC-85-4 ARO-18054.15-EL   F/G 10/2   NL

END
DATE
FILMED
8 -85
DTIC

ARO 18054.15-EL

QUASISTATIC CHARACTERISTICS OF ASYMMETRICAL AND
COUPLED COPLANAR-TYPE TRANSMISSION LINES

TECHNICAL REPORT

T. KITAZAWA
R. MITTRA

APRIL 1985

ELECTROMAGNETIC COMMUNICATION LABORATORY
DEPARTMENT OF ELECTRICAL AND COMPUTER ENGINEERING
ENGINEERING EXPERIMENT STATION
UNIVERSITY OF ILLINOIS
URBANA, ILLINOIS 61801

DTIC
ELECTE
JUN 2 7 1985
S D
G

06 6 134

THE FINDINGS IN THIS REPORT ARE NOT TO BE CONSTRUED AS AN OFFICIAL

DEPARTMENT OF THE ARMY POSITION, UNLESS SO DESIGNATED BY OTHER

AUTHORIZED DOCUMENTS.

Accession For		
NTIS GRA&I		☒
DTIC TAB		☐
Unannounced		☐
Justification		
By		
Distribution/		
Availability Codes		
	Avail and/or	
Dist	Special	
A/1		

DTIC
COPY
INSPECTED
1

AD-A156929

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION		1b. RESTRICTIVE MARKINGS			
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION/AVAILABILITY OF REPORT			
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE		DISTRIBUTION UNLIMITED			
4. PERFORMING ORGANIZATION REPORT NUMBER(S) EC 85-4; UILU-ENG-85-2546		5. MONITORING ORGANIZATION REPORT NUMBER(S) ARO 18054.15-EL			
6a. NAME OF PERFORMING ORGANIZATION Electromagnetic Communication Laboratory	6b. OFFICE SYMBOL *(If applicable)*	7a. NAME OF MONITORING ORGANIZATION Office of Naval Research Branch Office			
6c. ADDRESS *(City, State and ZIP Code)* Department of Electrical and Computer Engg. 1406 W. Green St. University of Illinois, Urbana, IL 61801		7b. ADDRESS *(City, State and ZIP Code)* 536 S. Clark St. Room 286 Chicago, IL 60605			
8a. NAME OF FUNDING/SPONSORING ORGANIZATION U. S. Army Research Office	8b. OFFICE SYMBOL *(If applicable)*	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER DAAG-29-82-K-0084			
8c. ADDRESS *(City, State and ZIP Code)* P.O. Box 12211 Research Triangle Park, NC 27709		10. SOURCE OF FUNDING NOS.			
		PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT NO.

11. TITLE *(Include Security Classification)*
Quasistatic Characteristics of Asymmetrical and Coupled Coplanar-type Transmission lines

12. PERSONAL AUTHOR(S)
T. Kitazawa and R. Mittra

13a. TYPE OF REPORT Technical	13b. TIME COVERED FROM _____ TO _____	14. DATE OF REPORT *(Yr., Mo., Day)* April 1985	15. PAGE COUNT 37

16. SUPPLEMENTARY NOTATION
The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

17.	COSATI CODES		18. SUBJECT TERMS *(Continue on reverse if necessary and identify by block number)*
FIELD	GROUP	SUB. GR.	millimeter waves; integrated circuits; transmission lines; coplanar guides

19. ABSTRACT *(Continue on reverse if necessary and identify by block number)*

In this paper, variational expressions for the capacitances of asymmetrical and coupled coplanar-type transmission lines are derived. The methods employed are quite general, and are useful for analyzing various types of coplanar-type transmission lines, with either an isotropic or anisotropic substrate. An accurate and efficient method of calculation is provided for the variational expressions and some numerical results are presented.

20. DISTRIBUTION/AVAILABILITY OF ABSTRACT	21. ABSTRACT SECURITY CLASSIFICATION		
UNCLASSIFIED/UNLIMITED ☒ SAME AS RPT. ☐ DTIC USERS ☐			
22a. NAME OF RESPONSIBLE INDIVIDUAL	22b. TELEPHONE NUMBER *(Include Area Code)*	22c. OFFICE SYMBOL	

QUASISTATIC CHARACTERISTICS OF ASYMMETRICAL AND
COUPLED COPLANAR-TYPE TRANSMISSION LINES

by

T. Kitazawa
R. Mittra

Electromagnetic Communication Laboratory
Department of Electrical and Computer Engineering
University of Illinois at Urbana-Champaign
Urbana, Illinois 61801

Technical Report

April 1985

ABSTRACT

In this paper variational expressions for the capacitances of asymmetrical and coupled coplanar-type transmission lines are derived. The methods employed are quite general, and are useful for analyzing various types of coplanar-type transmission lines, with either an isotropic or anisotropic substrate. An accurate and efficient method of calculation is provided for the variational expressions and some numerical results are presented.

TABLE OF CONTENTS

LIST OF FIGURES

LIST OF TABLES

L INTRODUCTION

Coplanar-type transmission lines have become quite attractive from the point of view of applications in microwave and millimeter-wave integrated circuits. The symmetrical coplanar waveguide [1] - [6] (CPW) as well as other similar configurations [7], [8] have received considerable attention in the literature. Recently, the asymmetrical version of the coplanar waveguide has been introduced [9], [10] because of the additional flexibility offered by the asymmetric configuration in the design of integrated circuits. The application of coplanar-type transmission lines to directional couplers was proposed by C. P. Wen [11] to achieve better isolation characteristics. However, the analytical method for a coupled line section, that is useful for obtaining design information, was based on the zeroth-order approximation, which assumed an infinitely thick substrate [11].

This paper derives the variational expressions for the line capacitances of the asymmetrical and coupled coplanar-type transmission lines. These expressions are quite general and are applicable to a wide class of coplanar-type transmission lines, geometries including those containing an anisotropic media. These expressions are employed in conjunction with an accurate and efficient numerical method based on the Rite procedure. Numerical results are shown for the line characteristics of asymmetrical and coupled coplanar-type transmission lines with anisotropic media are presented and compared with the exact analytical solutions for the special case of air as the substrate material. The comparison is found to be quite favorable.

1

II. VARIATIONAL EXPRESSIONS FOR THE LINE CAPACITANCES

In this section the formulation procedure will be outlined for the general structures of asymmetrical coplanar-type (A-CTL, Fig. 1(a)) and coupled coplanar-type transmission lines (C-CTL, Fig. 1 (b)), which include various coplanar-type transmission lines in Figure 2. The layered media in Figure 1 are uniaxially anisotropic and their permittivities are given by the following dyadic:

$$\hat{\epsilon}_i = \begin{vmatrix} \epsilon_{ixx} & \epsilon_{ixy} \\ \epsilon_{ixy} & \epsilon_{iyy} \end{vmatrix} \epsilon_0 \qquad i = 1,2,3 \tag{1}$$

where

$$\epsilon_{ixx} = \epsilon_{i\parallel} \cos^2\gamma_i + \epsilon_{i\perp} \sin^2\gamma_i \tag{2}$$

$$\epsilon_{iyy} = \epsilon_{i\parallel} \sin^2\gamma_i + \epsilon_{i\perp} \cos^2\gamma_i$$

$$\epsilon_{ixy} = (\epsilon_{i\parallel} - \epsilon_{i\perp}) \sin\gamma_i \cos\gamma_i$$

γ_i is the angle of the optical axis from the x-axis, and $\epsilon_{i\parallel}$ and $\epsilon_{i\perp}$ are the relative permittivities longitudinal and transverse to the optical axis, respectively.

A. Variational Expression for the Line Capacitance of Asymmetrical Coplanar-Type Transmission Lines (A-CTL)

From a solution to the Laplace's equation, the charge distribution on the conductors at y = 0 can be expressed in terms of the aperture field $e_x(x)$ at y = 0 as

$$\sigma(x) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} P_A(\alpha;x \mid x') e_x(x') \, dx' \, d\alpha \tag{3}$$

where

$$P_A(\alpha;x \mid x') = -j\alpha F_A(\alpha) e^{j\alpha(x-x')} \tag{4}$$

with

$$F_A(\alpha) = \frac{\epsilon_0}{2\pi} \left\{ Y_a(\alpha) + Y_L(\alpha) \right\} \frac{1}{|\alpha|} \tag{5}$$

and

2
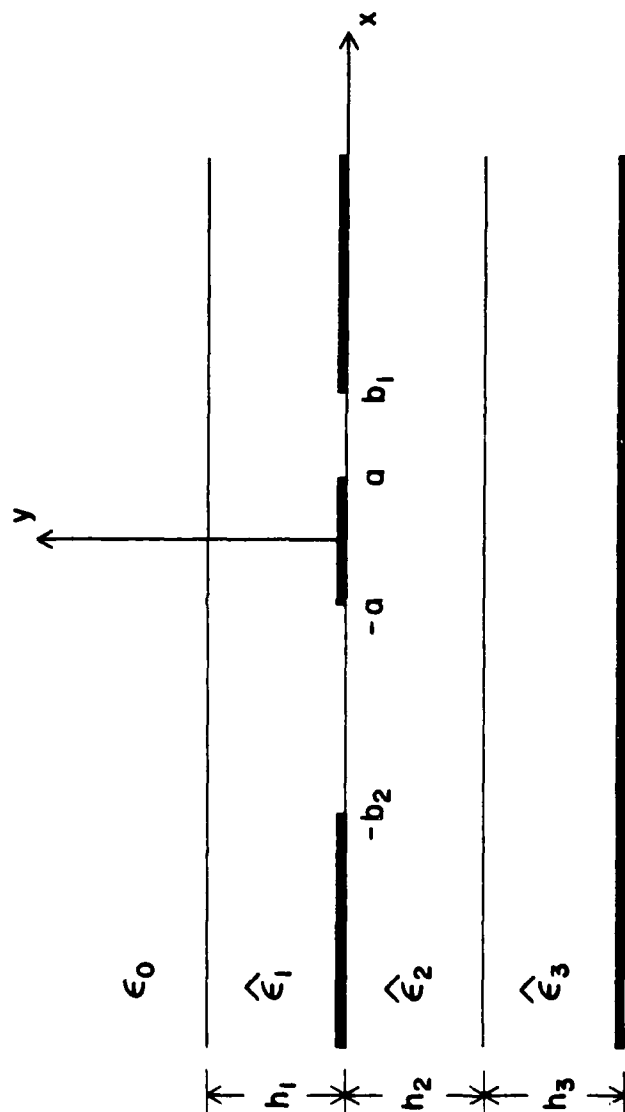
Figure 1a. General structure of asymmetrical coplanar-type transmission lines.

$$W_i = b_i - a \quad (i = 1, 2)$$

$$S_1 = \pm (a + b_1)/2$$
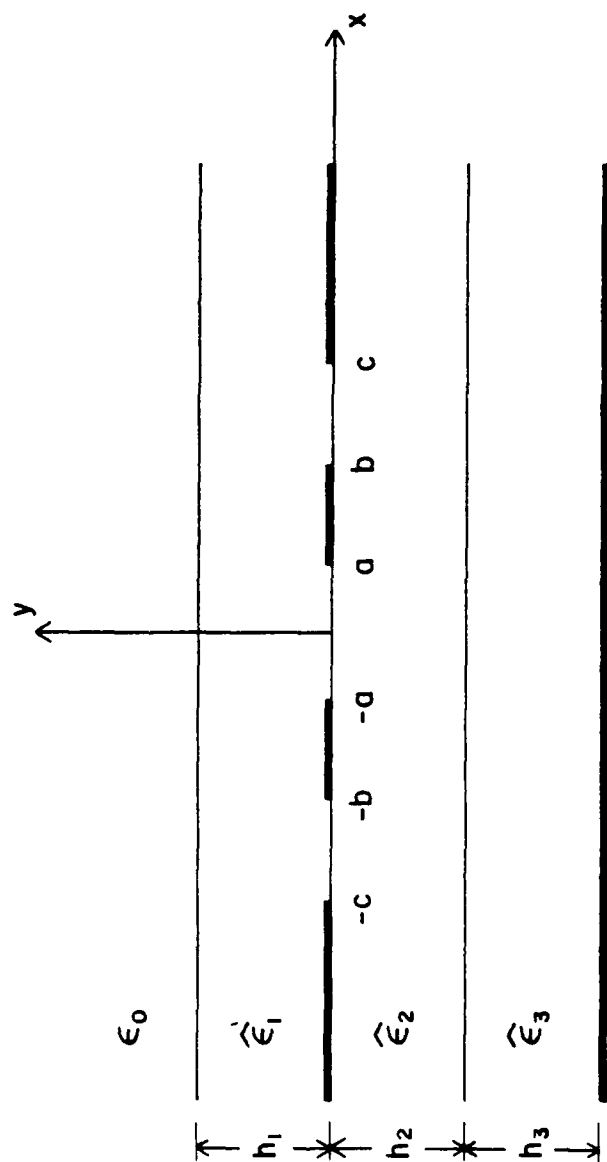
Figure 1b. General structure of open coupled coplanar-type transmission lines.
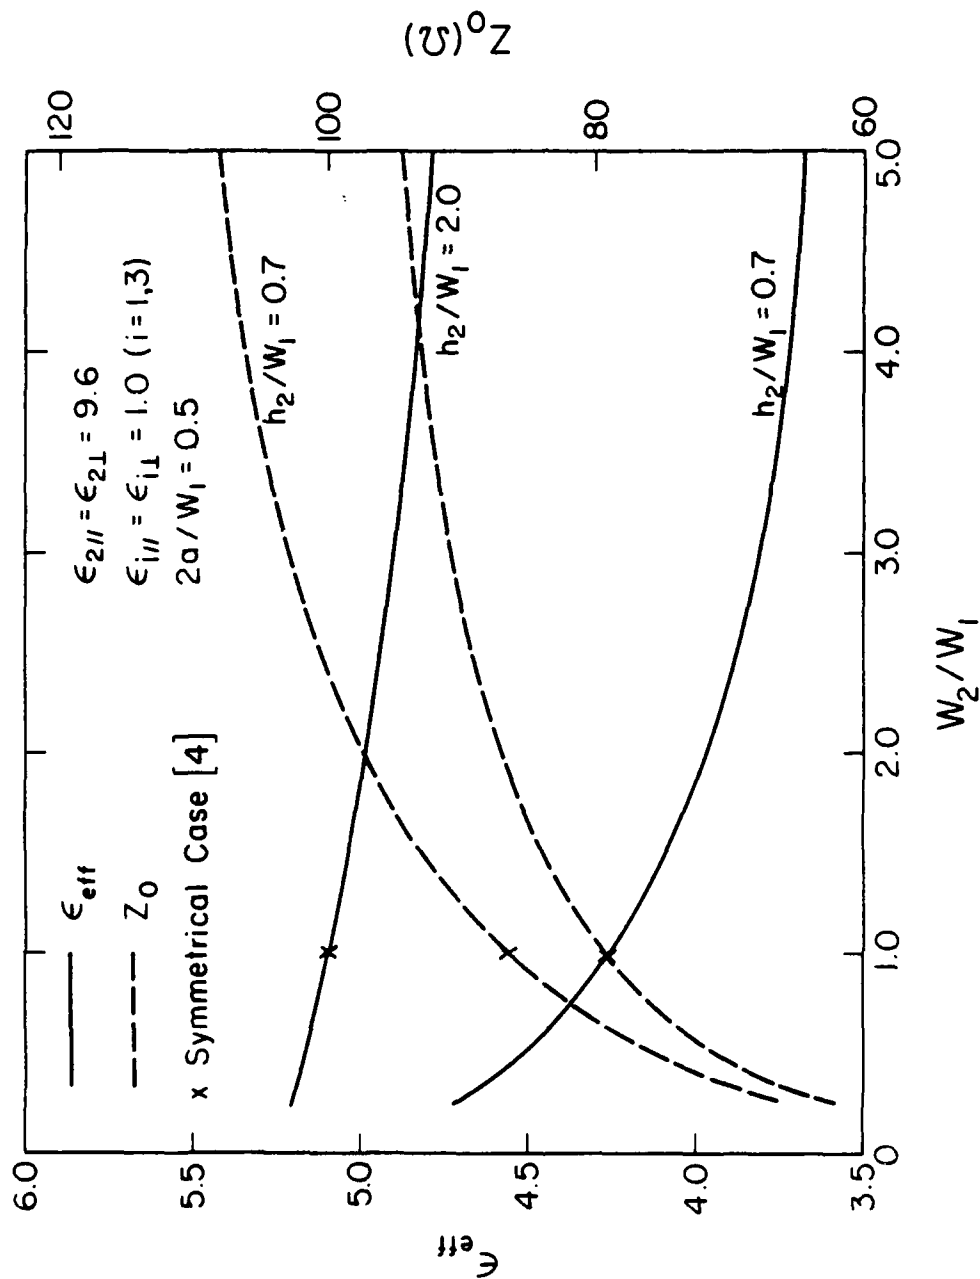
Figure 4. Asymmetrical coplanar waveguide on isotropic dielectric substrate.

18

TABLE 2

Normalized Line Capacitance C/ε_o of Open Coupled

Coplanar-type Transmission Lines

$$\varepsilon_{i||} = \varepsilon_{i\perp} = 1 \quad (i = 1, 2, 3), \quad h_3 \to \infty$$

Even Mode

$\dfrac{c-b}{b-a}$	$2a\big/(b-a)$ N_1 / N_2	1 2	2 3	Conformal mapping
0.5	0.2	1.9469	1.9469	1.9469
	1.0	2.0620	2.0619	2.0619
2.0	0.2	1.3130	1.3128	1.3128
	1.0	1.4043	1.4042	1.4041

Odd Mode

$\dfrac{c-b}{b-a}$	$2a\big/(b-a)$ N_1 / N_2	2 2	3 3	Conformal mapping
0.5	0.2	5.2218	5.2217	5.2217
	1.0	3.6322	3.6322	3.6322
2.0	0.2	4.9089	4.9012	4.9009
	1.0	3.2537	3.2495	3.2493

TABLE 1

Normalized Line Capacitance C/ε_o of Asymmetrical Coplanar-type Transmission Line

$$\varepsilon_{i||} = \varepsilon_{i\perp} = 1 \quad (i = 1, 2, 3), \quad h_3 \rightarrow 0$$

a/W_1	W_2/W_1	N_1 / N_2 : 1 / 1	2 / 2	3 / 3	Conformal mapping
	1	2.199	2.107	2.105	2.105
0.25	2	2.085	1.946	1.940	1.940
	4	2.085	1.858	1.838	1.836
	1	3.520	3.510	3.510	3.510
1.50	2	3.219	3.198	3.198	3.198
	4	3.005	2.956	2.956	2.956

where $T_k(y)$ is Chebyshev's polynomial of the first kind and the suffix $N(k)$ in (29) is given by

$$N(k) = 2k-1 \qquad \text{(even mode)}$$

$$= 2(k-1) \qquad \text{(odd mode)}.$$

The accuracy of the computation depends on the number of basis functions, i.e., N_1 and N_2 in (27). Tables 1 and 2 show the preliminary numerical results of the normalized capacitance C/ϵ_o of the A-CTL and open C-CTL for different values of N_1, N_2. Special cases with $\epsilon_{i\parallel} = \epsilon_{i\perp} = 1$ and $h_3 \to \infty$ are considered in Tables 1 and 2, for which the exact analytical solutions can be obtained by conformal mapping [Appendix 1]. It should be noted that accurate results are obtained by using a small number of suitably chosen basis functions for a wide range of parameters. For instance, for the calculations presented herein, $N_1 = N_2 = 2$ was used for A-CTL. For C-CTL, $N_1 = 1$, $N_2 = 2$ for even modes and $N_1 = N_2 = 2$ for odd modes have been employed.

Figures 4 and 5 present numerical examples for the asymmetrical coplanar waveguide in Fig. 2(a). Figure 4 shows the effective dielectric constant ϵ_{eff} and the characteristic impedance Z_0 as a function of the width ratio W_2/W_1 for an asymmetrical coplanar waveguide with an isotropic dielectric substrate. The values for the symmetrical case $(W_2/W_1 = 1)$ [4] are included only to indicate the accuracy of the computation. The effective dielectric constant ϵ_{eff} becomes smaller and the characteristic impedance Z_0 becomes larger as the width ratio W_2/W_1 increases.

Figure 5 shows the results for an asymmetrical coplanar waveguide on an anisotropic sapphire substrate. The effective dielectric constant and the characteristic impedance are shown as a function of the inclination of the optical axis γ_2.

In Figure 6, the even and odd mode characteristics of open C-CTL, shown in Figure 2(d), are compared with those based on the zeroth-order approximation as presented in Ref. 11. The error in the zeroth-order solution becomes larger for a thinner substrate because the substrate thickness is assumed to be infinite in this solution.

III. NUMERICAL COMPUTATION AND RESULTS

Numerical computations have been carried out by applying the Ritz procedure applied to the variational expressions (10) and (21). In this procedure, the unknown aperture fields $e_t(x)$ are expanded in terms of the appropriate basis functions as follows for asymmetrical coplanar-type (A-CTL) transmission lines the basis functions are:

$$e_t(x) = \sum_{k=1}^{N_1} A_k^{(1)} f_k^{(1)}(x) + \sum_{k=1}^{N_2} A_k^{(2)} f_k^{(2)}(x) \tag{27a}$$

and for the coupled coplanar-type transmission lines (C-CTL) the corresponding functions are given by

$$e_t(x) = \sum_{k=1}^{N_1} B_k^{(1)} g_k^{(1)}(x) + \sum_{k=1}^{N_2} B_k^{(2)} g_k^{(2)}(x) \tag{27b}$$

where $A_k^{(i)}$ and $B_k^{(i)}$ are variational parameters which are determined such that the best approximation is obtained under the conditions of (9) and (19). The following basis functions are adopted by taking the edge effect into consideration:

$$f_k^{(i)}(x) = \frac{T_{k-1}\left|\dfrac{2(x-S_i)}{W_i}\right|}{\sqrt{1 - \left|\dfrac{2(x-S_i)}{W_i}\right|^2}} \qquad i = 1, 2 \tag{28}$$

$$S_1 = \pm(a + b_1)/2, \qquad W_1 = b_1 - a$$

$$g_k^{(1)} = \frac{T_{N(k)}\left|\dfrac{x}{a}\right|}{\sqrt{1 - \left|\dfrac{x}{a}\right|^2}} \tag{29}$$

$$g_k^{(2)} = \frac{T_{k-1}\left|\dfrac{2(x-S)}{W}\right|}{\sqrt{1 - \left|\dfrac{2(x-S)}{W}\right|^2}} \tag{30}$$

$$W = c - b, \qquad S = (b + c)/2$$

14

However, unlike the open waveguide problem, this method is not applicable to the shielded case filled with an anisotropic medium, whose optical axis is inclined, because the Green's functions for the latter case cannot be expressed in the form given in (25) [12].
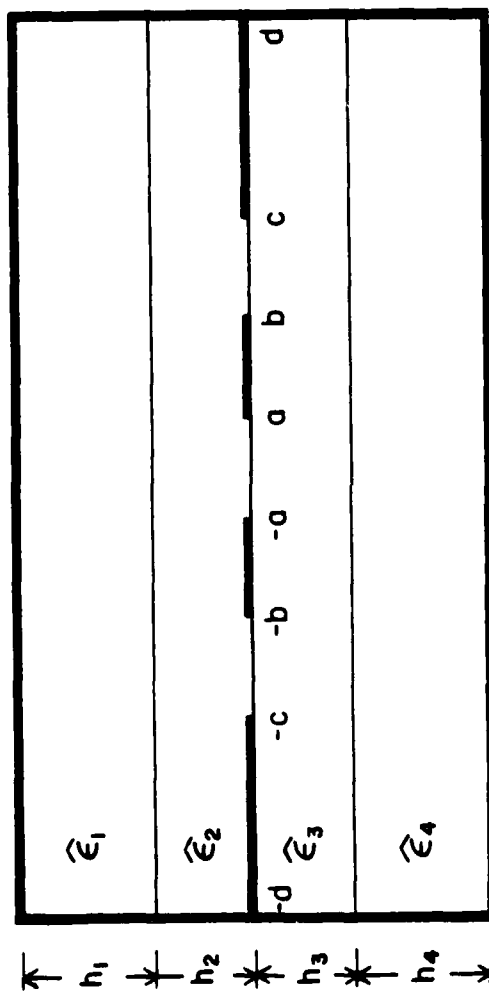
Figure 3. Shielded coupled coplanar-type transmission lines.

12

the anisotropic case to the equivalent isotropic case can be verified in the same manner as for the asymmetrical case.

The procedure described above can be applied to a shielded coupled coplanar-type transmission line (Figure 3) which is filled either with an isotropic or an anisotropic medium whose optical axis coincides with one of the coordinate axes. The line capacitances for the even and odd modes are given by

$$C = \frac{\sum_n \int_0^d \int_0^d e_x(x) G_n(x \mid x') e_x(x') \, dx' \, dx}{\left| \int_b^c e_x(x) \, dx \right|^2} \tag{24}$$

$$= E, 0$$

where

$$G_n^E(x \mid x') = F_n \sin(\alpha_n x) \sin(\alpha_n x') : \quad \textit{Even mode} \tag{25}$$

$$G_n^O(x \mid x') = F_n \cos(\alpha_n x) \cos(\alpha_n x') : \quad \textit{Odd mode}$$

with

$$F_n = \frac{\eta_n \epsilon_0}{d} (Y_{Un} + Y_{Ln}) \frac{1}{\alpha_n}$$

and

$$Y_{Un} = \frac{1 + \frac{\epsilon_{2e}}{\epsilon_{1e}} tahn(K_1 h_1 \alpha_n) \tanh(K_2 h_2 \alpha_n)}{\frac{1}{\epsilon_{1e}} tahn(K_1 h_1 \alpha_n) + \frac{1}{\epsilon_{2e}} tahn(K_2 h_2 \alpha_n)} \tag{26}$$

$$Y_{Ln} = \frac{1 + \frac{\epsilon_{3e}}{\epsilon_{4e}} tahn(K_3 h_3 \alpha_n) tahn(K_4 h_4 \alpha_n)}{\frac{1}{\epsilon_{3e}} \tanh(K_3 h_3 \alpha_n) + \frac{1}{\epsilon_{4e}} tahn(K_4 h_4 \alpha_n)}$$

$$\alpha_n = \frac{n \pi}{2d}, \qquad \eta_n = \begin{cases} 1 & (n = 0) \, n \\ 2 & (n \neq 0) \, n \end{cases}$$

$$n = 1, 3, 5, \underline{\quad} \text{ (Even mode)}$$

$$0, 2, 4, \underline{\quad} \text{ (Odd mode)}$$

11

$$Q_0 \int_b^c e_x(x_2)\, dx_2 = Q_0 V_0 \tag{18}$$

$$= \int_0^\infty \int_0^\infty F_C(\alpha) \left| \int_b^c e_x(x_2) \cos(\alpha x_2)\, dx_2 - V_0 \cos(\alpha x_1) \right| \cos(\alpha x')\, e_x(x')\, dx'\, d\alpha$$

$$(0 < x_1 < a)$$

where V_o is the potential difference between the strip conductor $a < x < b$ and the ground conductor $c < x$. V_o is given by

$$V_0 = \int_b^c e_x(x)\, dx = -\int_0^a e_x(x)\, dx \tag{19}$$

Subtracting (17) from (18) and utilizing (16), we obtain

$$Q_0 V_0 = \int_0^a \int_0^\infty \int_0^\infty F_C(\alpha) \cos(\alpha x_1) \cos(\alpha x')\, e_x(x_1)\, e_x(x')\, dx'\, d\alpha\, dx_1 \tag{20}$$

$$+ \int_b^c \int_0^\infty \int_0^\infty F_C(\alpha) \cos(\alpha x_2) \cos(\alpha x')\, e_x(x_2)\, e_x(x')\, dx'\, d\alpha\, dx_2$$

Therefore, the line capacitance of the odd mode can be expressed as follows:

$$C = \frac{Q_0}{V_0} \tag{21}$$

$$= \frac{\displaystyle\int_0^\infty \int_0^\infty \int_0^\infty e_x(x)\, G^O(\alpha;x \mid x')\, e_x(x')\, d\alpha\, dx'\, dx}{\left| \displaystyle\int_b^c e_x(x)\, dx \right|^2}$$

where Green's function $G^O(\alpha;x \mid x')$ is given by

$$G^O(\alpha;x \mid x') = F_C(\alpha) \cos(\alpha x) \cos(\alpha x') \tag{22}$$

For the even mode, a similar expression can be obtained by following the same procedure. The Green's function G^E for the even mode is given by

$$G^E(\alpha;x \mid x') = F_C(\alpha) \sin(\alpha x) \sin(\alpha x') \tag{23}$$

Equation (21) is stationary and provides an upper bound to the line capacitance C. The transition from

10

$$P_C(\alpha;x \mid x') = -\alpha \, F_C(\alpha) \cos(\alpha x) \sin(\alpha x') \tag{13}$$

$$(\textit{for even mode})$$

$$= -\alpha \, F_C(\alpha) \sin(\alpha x) \cos(\alpha x')$$

$$(\textit{for odd mode})$$

with

$$F_C(\alpha) = \frac{2\epsilon_o}{\pi} \left\{ Y_{L'}(\alpha) + Y_L(\alpha) \right\} \frac{1}{\alpha} \tag{14}$$

The symmetry of the geometry with respect to the plane x = 0 has been utilized in writing (12). The odd mode is considered in what follows, and a perfect electric conductor plane may be placed at the x = 0 plane in this case.

The total charge located between x_1 and x_2 is given by

$$Q(x_1,x_2) = \int_{x_1}^{x_2} \sigma(x) \, dx \tag{15}$$

When x_1 lies within the inner slot $0 < x_1 < a$ and x_2 lies within the outer slot $b < x_2 < c$, then Q (x_1,x_2) is equal to a constant Q_o, that is, the total charge on the strip a < x < b:

$$Q_0 = Q(x_1,x_2) \tag{16}$$

$$= \int_0^\infty \int_0^\infty F_C(\alpha) \left| \cos(\alpha x_2) - \cos(\alpha x_1) \right| \cos(\alpha x') \, e_x(x') \, dx' \, d\alpha$$

$$0 < x_1 < a \quad \text{and} \quad b < x_2 < c$$

Multiplying (16) by $e_x(x_1)$ and integrating over $0 < x_1 < a$, we obtain

$$Q_0 \int_0^a e_x(x_1) \, dx_1 = -Q_0 V_0 \tag{17}$$

$$= \int_0^\infty \int_0^\infty F_C(\alpha) \left| -V_0 \cos(\alpha x_2) - \int_0^a e_x(x_1) \cos(\alpha x_1) \, dx_1 \right| \cos(\alpha x') \, e_x(x') \, dx' \, d\alpha$$

$$(b < x_2 < c)$$

Similarly we can obtain

9

$$V_o = \int_a^{b_1} e_x(x)\, dx = -\int_{-b_2}^{-a} e_x(x)\, dx \tag{9}$$

Substituting (3) into (8), subtracting (8b) from (8a), and rearranging the resulting expression, we obtain the line capacitance:

$$C = \frac{Q_o}{V_o} \tag{10}$$

$$= \frac{\displaystyle\int_{-\infty}^{\infty}\int_{-\infty}^{\infty}\int_0^{\infty} e_x(x)\, G_A(\alpha;x\mid x')\, e_x(x')\, d\alpha\, dx'\, dx}{\left[\displaystyle\int_a^{b_1} e_x(x)\, dx\right]^2}$$

where the Green's function G_A is given by

$$G_A(\alpha;x\mid x') = 2\, F_A(\alpha)\cos\left\{\alpha(x'-x)\right\} \tag{11}$$

As expected, Equation (10) reduces to (2) in [5] for the symmetrical coplanar waveguide. It can be verified that Equation (10) has the stationary property and the value of the capacitance derived from this expression will always be larger than the true value, that is, the upper bound. Also, Equations (10), (11) and (5) show the relationship between the anisotropic ($\epsilon_{i\perp}$, $\epsilon_{i\parallel}$, h_i) and the isotropic (ϵ_{ie}, $K_i h_i$) cases. Similar connection between the two types of problems has been observed elsewhere [5], [12] - [18] for other configurations.

B. Variational Expression for the Line Capacitance of Coupled C-Type Transmission Lines (C-CTL)

The charge distribution on the conductors at $y = 0$ can be related to the aperture field $e_x(x)$ at $y = 0$ plane by using a procedure similar to that used for the asymmetrical coplanar-type transmission line. The charge distribution $\sigma(x)$ is given by

$$\sigma(x) = \int_0^{\infty}\int_0^{\infty} P_C(\alpha;x\mid x')\, e_x(x')\, dx'\, d\alpha \tag{12}$$

where

8

$$Y_{U}(\alpha) = \frac{1 + \epsilon_{le} \ \tanh(K_1 h_1 |\alpha|)}{1 + \dfrac{1}{\epsilon_{le}} \ \tanh(K_1 h_1 |\alpha|)} \tag{6}$$

$$Y_L(\alpha) = \frac{1 + \dfrac{\epsilon_{2e}}{\epsilon_{3e}} \ \tanh(K_2 h_2 |\alpha|) \tanh(K_3 h_3 |\alpha|)}{\dfrac{1}{\epsilon_{2e}} \ \tanh(K_2 h_2 |\alpha|) + \dfrac{1}{\epsilon_{3e}} \ \tanh(K_3 h_3 |\alpha|)}$$

$$k_i = \sqrt{\frac{\epsilon_{ixx}}{\epsilon_{iyy}} - \left|\frac{\epsilon_{ixy}}{\epsilon_{iyy}}\right|^2}$$

$$\epsilon_{ie} = \sqrt{\epsilon_{ixx} \ \epsilon_{iyy} - \epsilon_{ixy}^2}$$

The total charge Q_o on the center strip $|x| < a$ can be expressed as follows:

$$Q_o = \int_{x_2}^{x_1} \sigma(x) \, dx \tag{7}$$

where x_1 and x_2 can be arbitrary values in the right slot $2 < x_1 < b_1$ and in the left slot $-b_2 < x_2 < -2$, respectively.

Multiplying (7) by $e_x(x_1)$ and integrating over the right slot located at $a < x_1 < b_1$, we get

$$Q_o V_o = \int_a^{b_1} e_x(x_1) \left\{ \int_{x_2}^{x_1} \sigma(x) \, dx \right\} dx_1 \tag{8a}$$

$$(-b_2 < x_2 < -2)$$

Similarly,

$$-Q_o V_o = \int_{-b_2}^{-a} e_x(x_2) \left\{ \int_{x_2}^{x_1} \sigma(x) \, dx \right\} dx_2 \tag{8b}$$

$$(a < x_1 < b)$$

where V_o is the potential difference between the center strip and the ground conductors, i.e.,

$$\epsilon_0$$

$$\widehat{\epsilon}_2$$

$$\epsilon_0$$

(d)

$$\epsilon_0$$

$$\widehat{\epsilon}_1$$

$$\widehat{\epsilon}_2$$

$$\epsilon_0$$

(e)

$$\epsilon_0$$

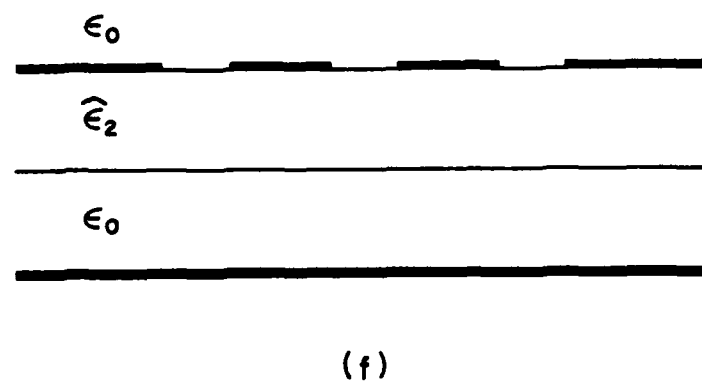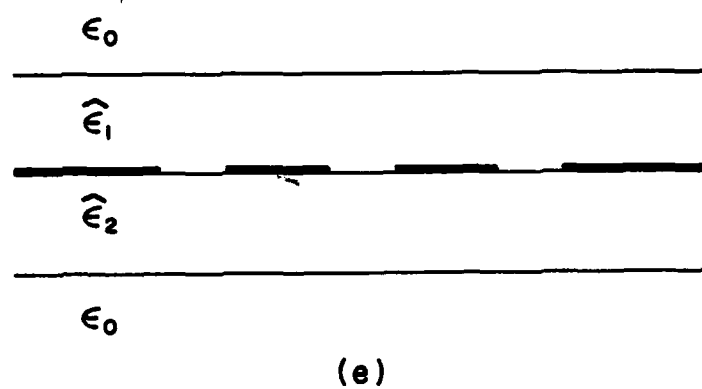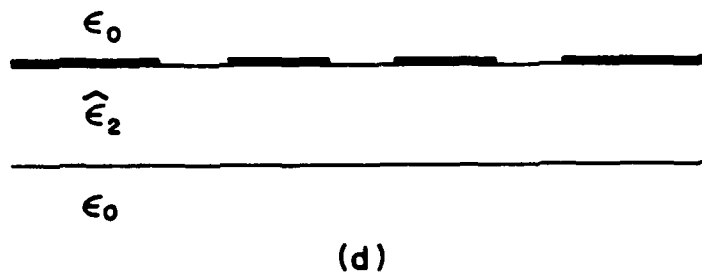$$\widehat{\epsilon}_2$$

$$\epsilon_0$$

(f)

Figure 2. (d) coupled coplanar waveguide

(e) coupled sandwich coplanar waveguide

(f) coupled conductor-backed coplanar waveguide

ϵ_0

$\widehat{\epsilon}_2$

ϵ_0

(a)

ϵ_0

$\widehat{\epsilon}_1$

$\widehat{\epsilon}_2$

ϵ_0

(b)

ϵ_0

$\widehat{\epsilon}_2$
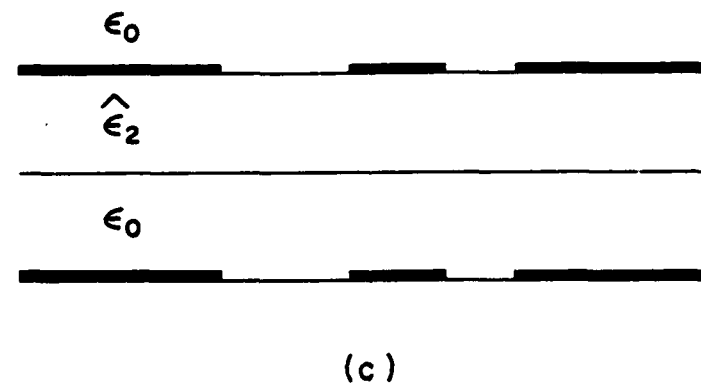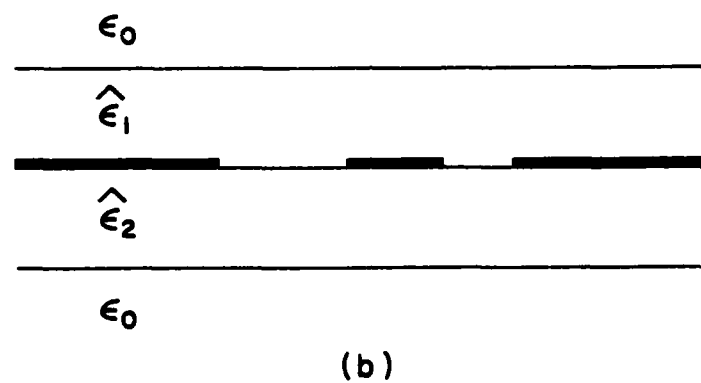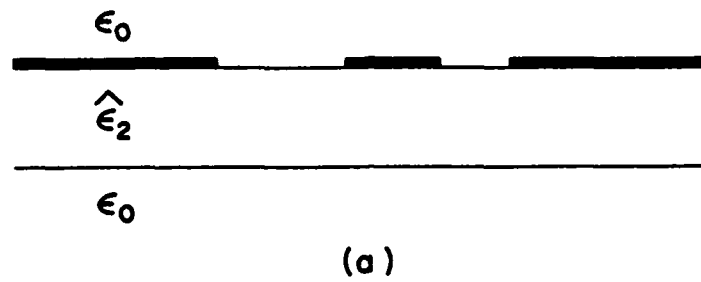
ϵ_0

(c)

Figure 2. (a) asymmetrical coplanar waveguide

(b) asymmetrical sandwich coplanar waveguide

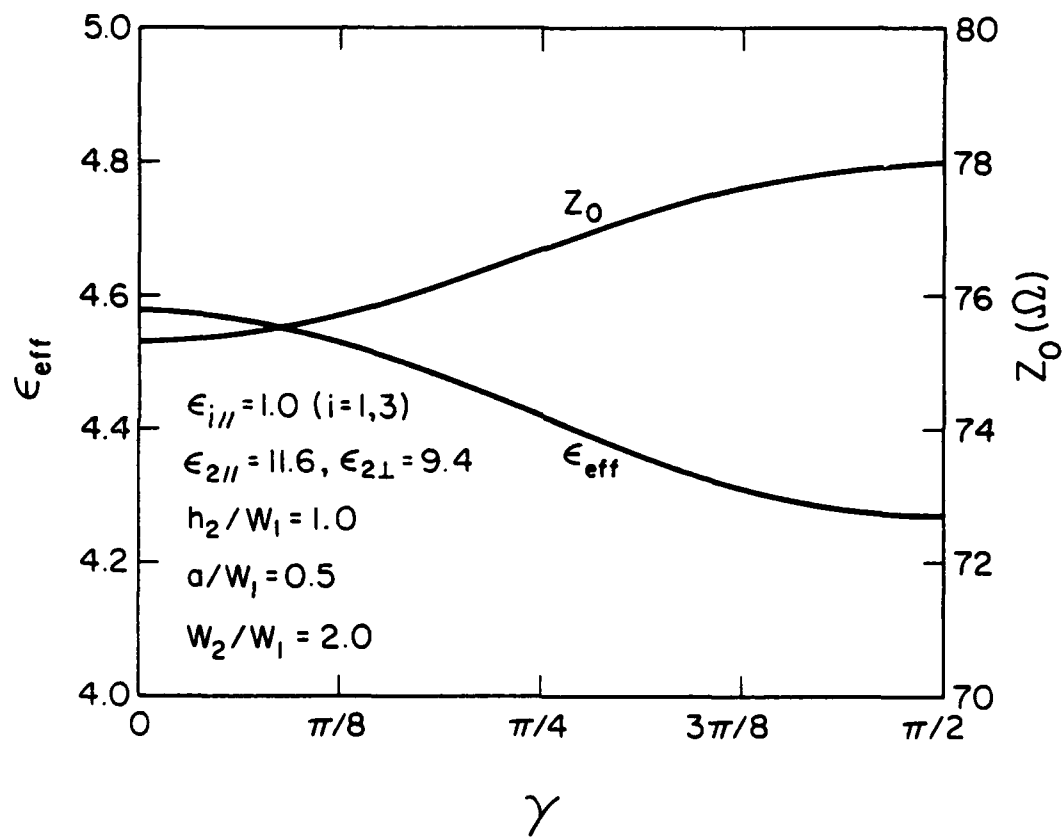(c) asymmetrical conductor-backed coplanar waveguide

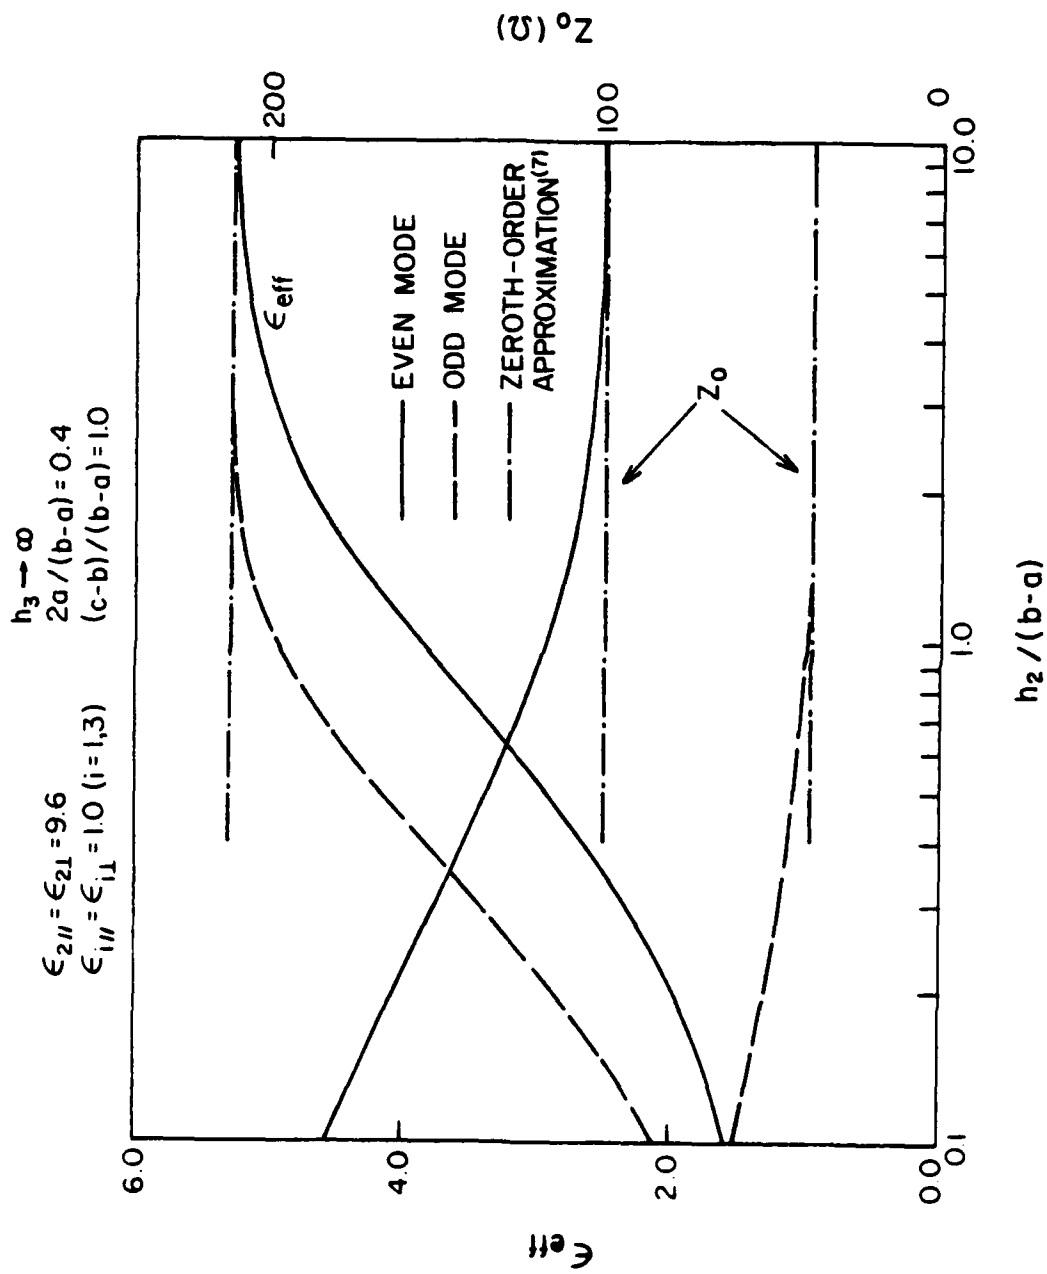Figure 5. Asymmetrical coplanar waveguide on anisotropic sapphire substrate.

Figure 6. The comparison of this method with the zeroth-order approximation of C-CTL.

Figure 7 shows the even- and odd-mode characteristics of the open C-CTL on an isotropic substrate as a function of electrode configurations. The dependence on the width of inner slot 2a is less for even modes; in contrast, the dependence on the width of the outer slot $(C-b)$ is less for odd modes.

Figure 8 shows the characteristics of the open C-CTL on an anisotropic substrate ($\epsilon_{2\parallel} = 5.12$, $\epsilon_{2\perp} = 3.40$). The effective dielectric constant ϵ_{eff} and the characteristic impedance Z_0 are shown as a function of the angle γ_2 of the optical axis from the x-axis.

Figure 9 shows the results for a shielded C-CTL with an anisotropic sapphire substrate ($\epsilon_{3\parallel} = 11.6$, $\epsilon_{3\perp} = 9.4$, $\gamma_3 = \pi/2$). It is noted that the even modes are more sensitive than the odd modes to the variation in h_4, the spacing between the substrate and the shielding conductor. Equal even- and odd-mode phase velocities are obtained by adjusting h_4 and under these conditions high directivity can be achieved in a directional coupler design that employs these lines.
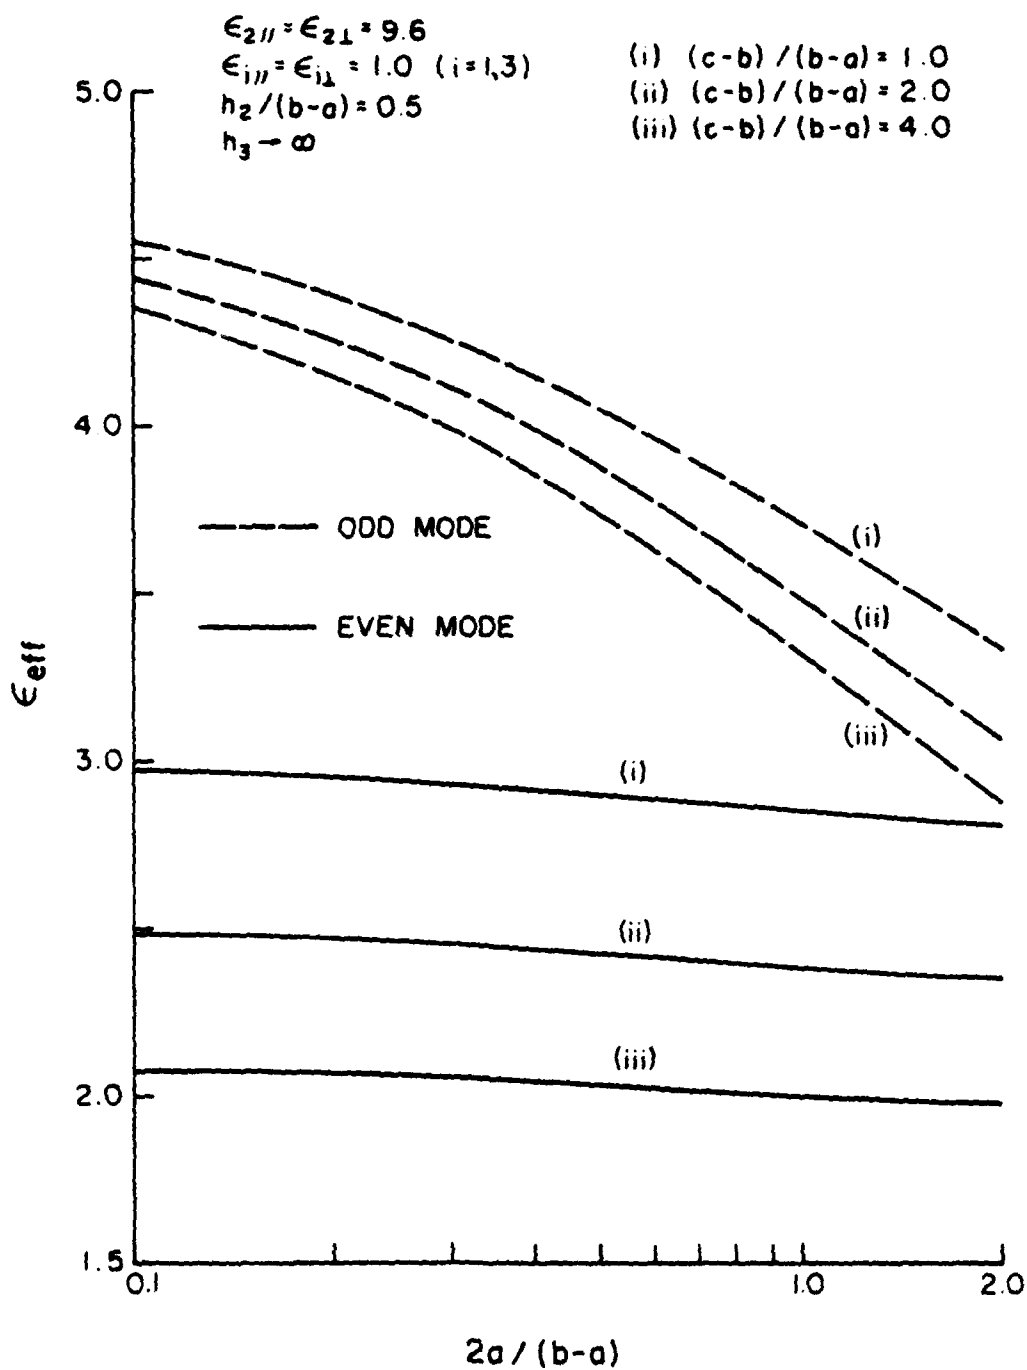
Figure 7a. Effective dielectric constant ε_{eff} of open C-CTL.

22
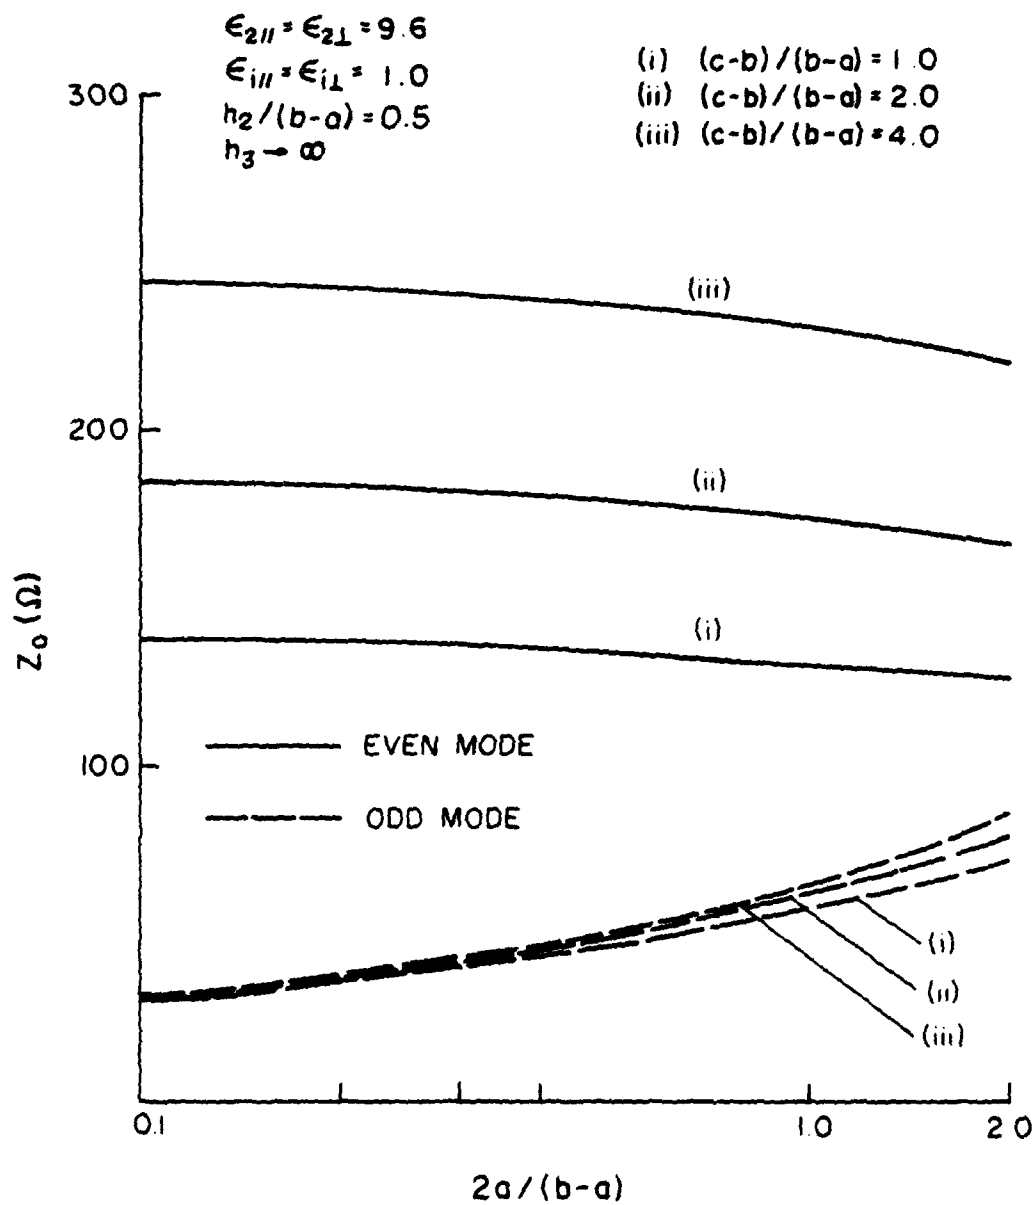
Figure 7b. Characteristic impedance Z_o of open C-CTL.

The figure shows a plot with the following parameters:

$\epsilon_{2//} = \epsilon_{2\perp} = 9.6$
$\epsilon_{i//} = \epsilon_{i\perp} = 1.0$
$h_2/(b-a) = 0.5$
$h_3 \to \infty$

(i) $(c-b)/(b-a) = 1.0$
(ii) $(c-b)/(b-a) = 2.0$
(iii) $(c-b)/(b-a) = 4.0$

Y-axis: $Z_o (\Omega)$ with values 100, 200, 300

X-axis: $2a/(b-a)$ with values 0.1, 1.0, 2.0

EVEN MODE
ODD MODE

23
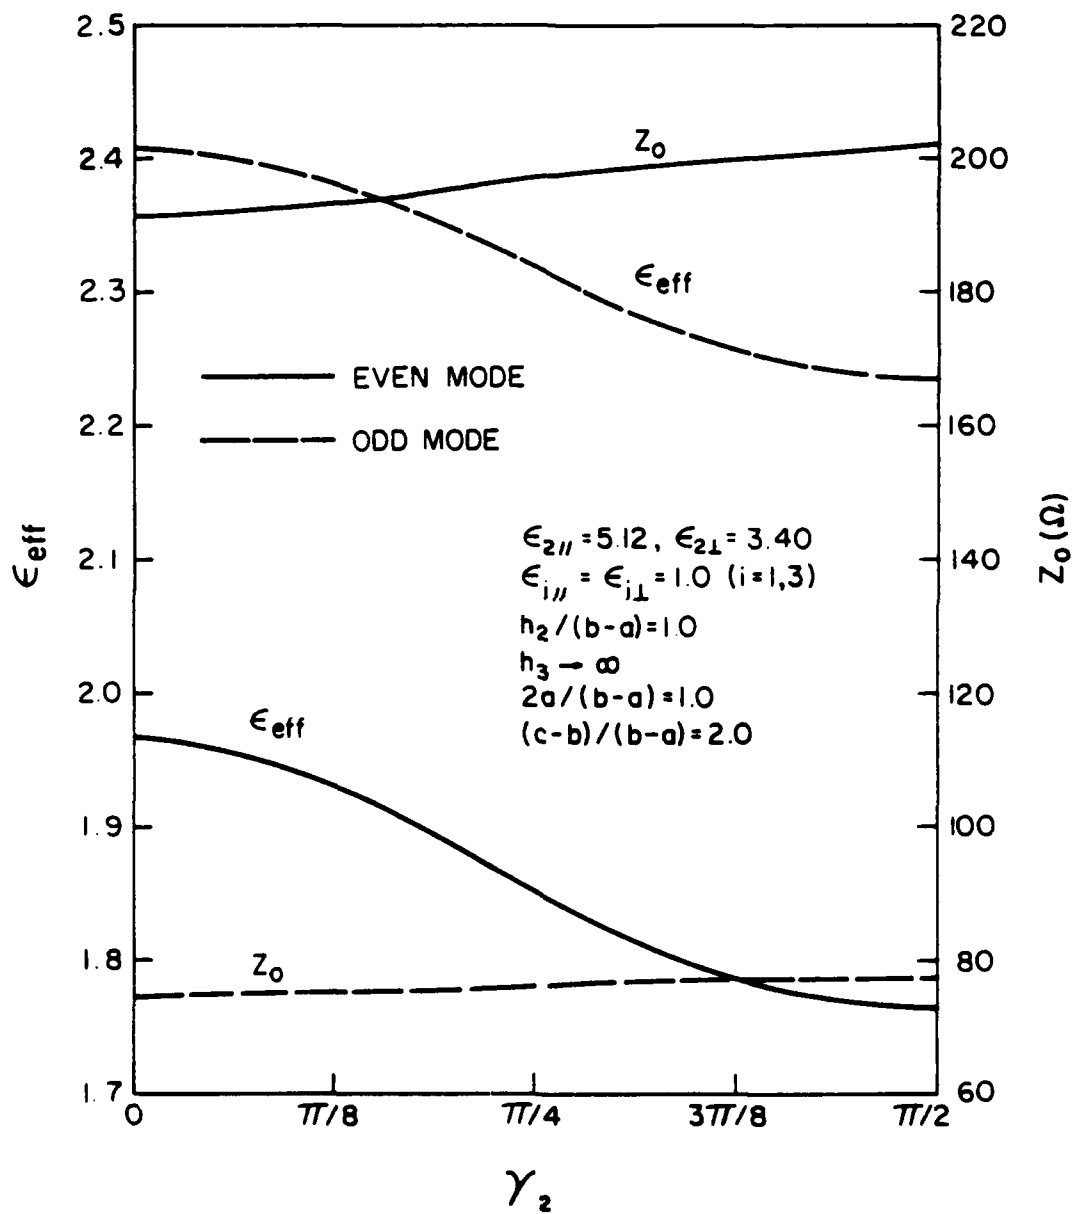
Figure 8. Effective dielectric constant and characteristic impedance of C-CTL versus γ_2.

$\epsilon_{3//} = 11.6, \epsilon_{3\perp} = 9.4, \gamma_3 = \pi/2$
$\epsilon_{i//} = \epsilon_{i\perp} = 1.0 \quad (i = 1,2,4)$
$(h_1 + h_2)/(b-a) = 10.0, h_3/(b-a) = 0.6$
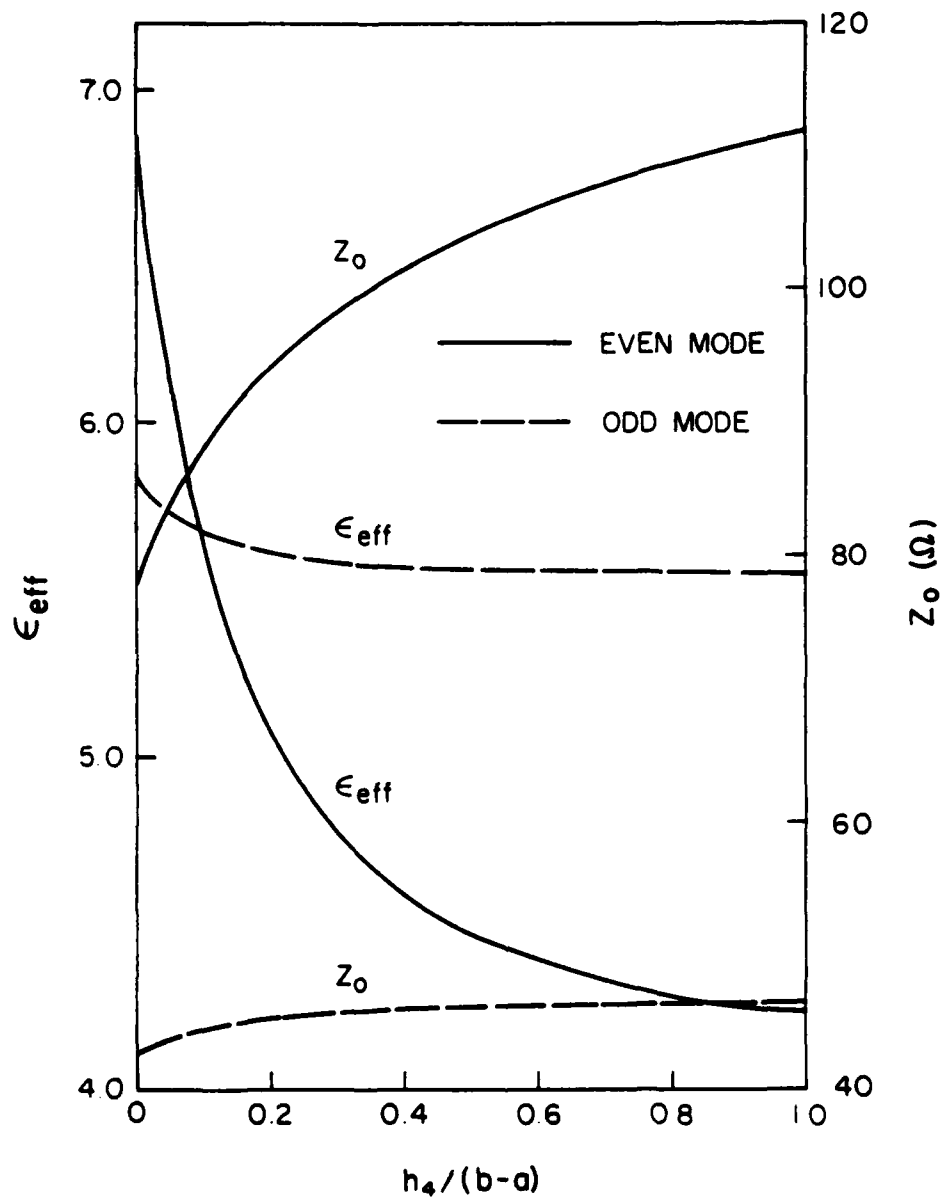$2a/(b-a) = 0.6, (c-b)/(b-a) = 2.0, d/(b-a) = 5.0$

Figure 9. Effective dielectric constant ϵ_{eff} and characteristic impedance Z_o of shielded C-CTL with an anisotropic sapphire substrate.

25

IV. CONCLUSIONS

In this paper variational expressions for the line capacitances are derived for the general structures of asymmetrical and coupled coplanar-type transmission lines. The present analysis, which is valid for anisotropic media, suggests a relationship between the anisotropic and the equivalent isotropic case.

An efficient computational scheme, based on the Ritz procedure, has been employed for the numerical computations. Numerical results have been compared with the exact analytical solutions for the special case of air as the substrate material; excellent agreement has been found for a wide range of parameters. Some numerical data for asymmetrical and coupled coplanar-type transmission lines are shown for both the isotropic and anisotropic substrates.

APPENDIX I

ASYMMETRICAL COPLANAR WAVEGUIDE WITHOUT SUBSTRATES

The line capacitances of the asymmetrical coplanar waveguide without substrates can be evaluated analytically by a repeated application of conformal mapping. A series of transformations are shown in Fig. 10. The determinantal equations for the ratios t_3/u_3 and s_3/t_3, which determine k_3, are given in the following:
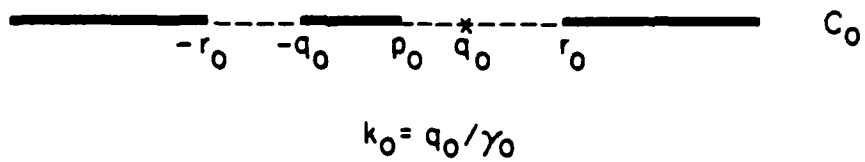
the determinatal equation of t_3/u_3

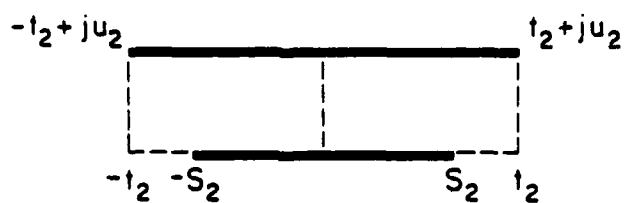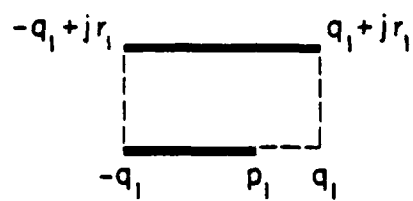$$2 \frac{K(k_o)}{K'(k_o)} = \frac{K\left[\frac{t_3}{u_3}\right]}{K'\left[\frac{t_3}{u_3}\right]} \tag{A-1}$$

the determinatal equation of s_3/t_3

$$\frac{F(arcsin \frac{p_o}{q_o} \cdot_o)}{K(k_o)} + 1 = 2 \frac{F(arcsin \frac{s_3}{t_3}, \frac{t_3}{u_3})}{K\left[\frac{t_3}{u_3}\right]} \tag{A-2}$$

where $F(a,b)$ is the elliptic integral of the first kind and $K(k)$ is the complete elliptic integral of the first kind.

27

C_0

$-r_0$ $-q_0$ p_0 q_0^* r_0

$k_0 = q_0/\gamma_0$

(a)

$-q_1 + jr_1$ $q_1 + jr_1$

$C_1 = C_0/2$

$-q_1$ p_1 q_1

$-t_2 + ju_2$ $t_2 + ju_2$

$C_2 = 2C_1$
$= C_0$

$-t_2$ $-S_2$ S_2 t_2

$S_2 = p_1 + q_1$

$t_2 = 2q_1$

$u_2 = r_1$

Figure 10. A series of transformations for the asymmetrical coplan..r
waveguide (ACPW) without a substrate. The geometry of
the line is shown in (a).

28

$$-u_3 \quad -t_3 \quad -s_3 \qquad s_3 \quad t_3 \quad u_3$$

$$C_3 = 2C_2$$
$$= 2C_0$$

$$k_3 = s_3/u_3$$

$$-s_4 + ju_4 \qquad\qquad s_4 + ju_4$$

$$-s_4 \qquad\qquad s_4$$
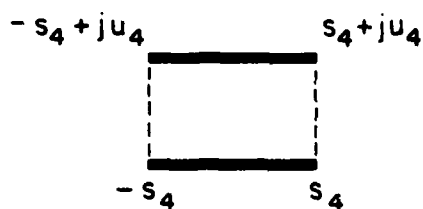
$$C_4 = C_3/2 = C_0$$

$$C_4 = \epsilon_0 \frac{2s_4}{u_4} = 2\epsilon_0 \frac{K(k_3)}{K'(k_3)}$$

―――――― Electric Wall

― ― ― ― ― Magnetic Wall

Figure 10. Continued

REFERENCES

1. C. P. Wen, "Coplanar waveguide: A surface strip transmission line suitable for nonreciprocal gyromagnetic device applications," *IEEE Trans. Microwave Theory Tech.*, (1969 Symposium Issue), vol. MTT-17, pp. 1087-1090, December 1969.

2. J. B. Knorr and K. D. Kuchler, "Analysis of coupled slots and coplanar strips on dielectric substrates," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-23, pp. 541-548, July 1975.

3. Y. Hayashi, T. Kitazawa and S. Sasaki, "Analysis of coplanar strip lines on an anisotropic substrate using Galerkin's method," *Trans. IECE Japan*, vol. 64-B, no. 7, pp. 666-673, July 1981.

4. T. Kitazawa and Y. Hayashi, "Coupled slots on an anisotropic sapphire substrate," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-29, pp. 1035-1040, October 1981.

5. T. Kitazawa and Y. Hayashi, "Quasi-static characteristics of coplanar waveguide on a sapphire substrate with its optical axis inclined," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-30, pp. 920-922, June 1982.

6. S. Seki and H. Hasegawa, "Cross-tie slow-wave coplanar waveguide on semi-insulating GaAs substrates," *Electron. Lett.*, vol. 17, pp. 940-941, Dec. 1981.

7. Y. C. Shih and T. Itoh, "Analysis of conductor-backed coplanar waveguide," *Electron. Lett.*, vol. 18, pp. 538-540, June 1982.

8. G. Leuzzi, A. Silbermann and R. Sorrentino, "Mode propagation in laterally bounded conductor-backed coplanar waveguides," presented at the 1983 G-MTT International Microwave Symp., Boston, Ma.

9. M. Kitlinski and B. Janiczak, "Dispersion characteristics of asymmetric coupled slot lines on dielectric substrates," *Electron. Lett.*, vol. 19, pp. 91-92, February 1983.

10. L. Kneppo, J. Cotzman and D. Cesta, "Basic parameters of nonsymmetrical coplanar line," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-25, pp. 718, August 1977.

11. C. P. Wen, "Coplanar-waveguide directional couplers," *IEEE Trans. Microwave Theory & Techniques*, vol. MTT-18, pp. 318-322, June 1970.

12. M. Kobayashi and R. Terakado, "New view on an anisotropic medium and its application to transformation from anisotropic to isotropic problems," *IEEE Trans. Microwave Theory & Techniques.* vol. MTT-27, pp. 769-775, Sept. 1979.

13. T. Kitazawa, K. Fujita, H. Mukaihara, and Y. Hayashi, "Analysis of broadside-coupled strip lines with anisotropic substrate," *Trans. IECE Japan.* vol. 66-B, no. 9, pp. 1139-1146, Sept. 1983.

14. N. G. Alexopoulos, C. M. Krowne, and S. Kerner, "Dispersionless coupled microstrip over fused silica-like anisotropic substrates," *Electron. Lett.*, vol. 12, pp. 579-580, Oct. 1976.

15. N. G. Alexopoulos and N. K. Vzuneglu, "Characteristics of microstrip on anisotropic substrates," Conference Proceedings, 7th European Microwave Conference, pp. 140-143, Sept. 1977.

16. N. G. Alexopoulos and C. M. Krowne, "Characteristics of single and coupled microstrips on anisotropic substrates," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-26, pp. 387-393, June 1978.

17. M. Kobayashi and R. Terakado, "Method for equalizing phase velocities of coupled microstrip lines by using anisotropic substrate," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-28, pp. 719-722, July 1980.

18. M. Horno, "Quasistatic characteristics of covered coupled microstrips on anisotropic substrates: spectral and variational analysis," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-30, pp. 1888-1892, Nov. 1982.

ATE
MED
_8